An Advanced Lighting Technologies Company, USA

VENTURE 24-30W LED DRIVER

Features :

. Constant current output
. Active power factor correction
. Reliable & consistent performance
. Operating temperature -40°c to 70°c
. 8KV Surge protection
. Protections: OVP/SCP/OTP
. Free air convection cooling
. Thermal conductive Bio Plastic housing
. Standard Warranty - 1 Year
. RoHS compliant
. Net Weight 0.153kg

Technical Specification:

MODEL		VLD24WCCUN-P	VLD30WCCUN-P
INPUT	VOLTAGE RANGE	90 ~ 265VAC	
	FREQUENCY	50/60Hz	
	POWER FACTOR	PF>0.99 @ 90VAC, PF>0.99@ 120VAC, PF>0.97 @240VAC, PF>0.95@265VAC at full load	
	TOTAL HARMONIC DISTORTION	< 10%	
	EFFICIENCY (Typ.)	>80%	
	AC CURRENT (Typ.)	0.10@240	0.14@240
OUTPUT	DC VOLTAGE	34-39	25-35
	RATED CURRENT	0.7A max	1.0A max
	CURRENT RANGE	0.68-0.70	1.23-1.25
	RATED POWER	24W	30W
	VOLTAGE TOLERANCE	31.04-31.40	31.05-31.30
COMPLIANCE STANDARD		NON BIS	

Mechanical Dimensions:

Dimensions (L×W×H): 155X55X38MM

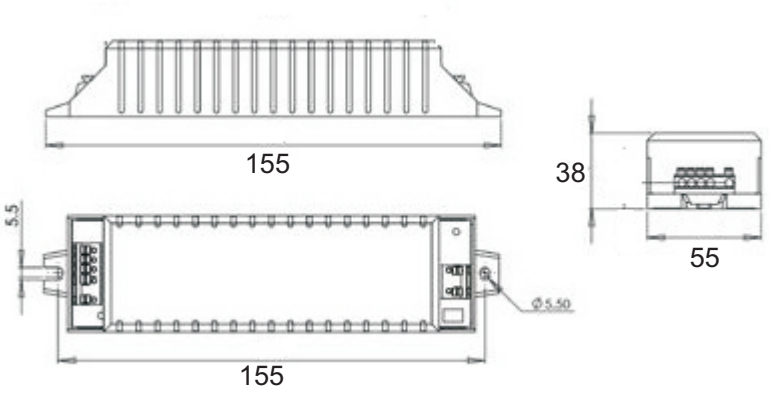

RoHS Compliant

VENTURE LIGHTING